


TOPIQ® Efficient pro

$$\alpha_W = 1.00$$


TOPIQ® Efficient pro provides the highest possible class A sound absorption with high humidity resistance and different coating options.

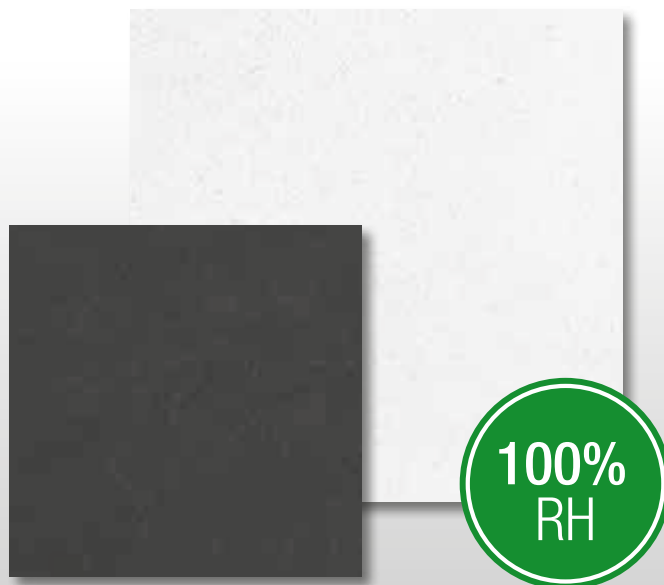

Technical Performance

Sound absorption	EN ISO 354 $\alpha_W = 1.00$ according to EN ISO 11654 $NRC = 0.95$ according to ASTM C 423
Sound attenuation	$D_{n,f,w} = 25$ dB according to EN ISO 10848
Sound attenuation	$R_w = 15$ dB according to EN ISO 10140-2:2010
Humidity resistance	up to 100% relative humidity
Building material class	A1 according to EN 13501-1
Light reflection	For white similar to RAL 9010 glare-free approx. 88%
Colour	White similar to RAL 9010 Black similar to RAL 9004 (only for SK edges available)

Sound absorption values (TOPIQ® Efficient pro)

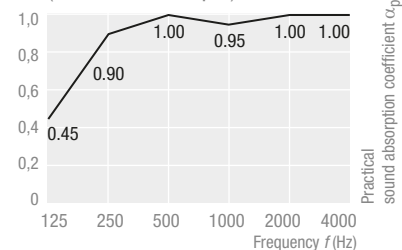

System **C**

Exposed system, tiles demountable

Recommended module in mm	Thickness/weight TOPIQ® Efficient pro 20 mm (approx. 2.8 kg/m²)		
	System C		
	SK	VT-S 15/24	VT-S 15F
Please note minimum quantities and lead times.			
600 x 600	•	•	•
625 x 625	•	•	•
600 x 1200	•	•	•
625 x 1250	•	•	•