

# TOPIQ® Efficient pro Hygena

$$\alpha_w = 1.00$$



TOPIQ® Efficient pro Hygena offers the same excellent performance as TOPIQ® Efficient pro with the added benefit of superior hygiene properties. The surface is washable and anti-microbial (resistant to the growth of germs, bacteria and fungi).



## Technical Performance

<b>Sound absorption</b>	EN ISO 354 $\alpha_w = 1.00$ according to EN ISO 11654 $NRC = 0.95$ according to ASTM C 423
<b>Sound attenuation</b>	$D_{n,f,w} = 25$ dB according EN ISO 10848
<b>Sound attenuation</b>	$R_w = 15$ dB according EN ISO 10140-2:2010
<b>Humidity resistance</b>	up to 100% relative humidity
<b>Building material class</b>	A1 according to EN 13501-1
<b>Light reflection</b>	For white similar to RAL 9010 glare-free approx. 88%
<b>Hygiene</b>	prevents bacteria and fungi
<b>Clean room classification</b>	class 4 according ISO 14644-1 zone 4 bacteriological purity class: M1 decontamination class: CP <sub>(0,5)</sub> <sup>5</sup>
<b>Colour</b>	White similar to RAL 9010

Sound absorption values  
(TOPIQ® Efficient pro Hygena)

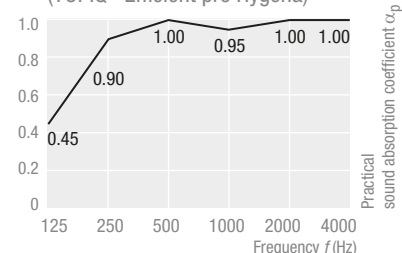

## System **C**

Exposed system, tiles demountable

Recommended module in mm	Thickness/weight TOPIQ® Efficient pro Hygena 20 mm (approx. 2.6 kg/m²)		
	System <b>C</b>		
	SK	VT-S 15/24	VT-S 15F
Please note minimum quantities and lead times.			
600 x 600	•	•	•
625 x 625	•	•	•
600 x 1200	•	•	•
625 x 1250	•	•	•