



TOPIQ® Prime

$$\alpha_W = 0.95$$


TOPIQ® Prime combines excellent technical performance with simple elegance. Offering class A sound absorption with high humidity resistance good sound attenuation.



Technical Performance


Sound absorption	EN ISO 354 $\alpha_W = 0.95$ according to EN ISO 11654 $NRC = 0.90$ according to ASTM C 423
Sound attenuation	$D_{n,f,w} = 24$ dB according EN ISO 10848
Sound attenuation	$R_w = 13$ dB according EN ISO 10140-2:2010
Humidity resistance	up to 100% relative humidity
Building material class	A1 according to EN 13501-1
Light reflection	For white similar to RAL 9010 glare-free approx. 88%
Colour	White similar to RAL 9010

Sound absorption values (TOPIQ® Prime)

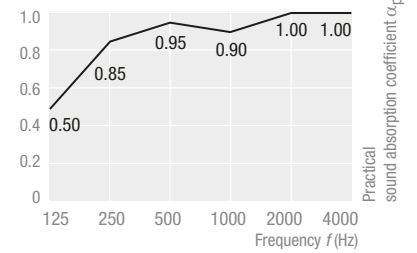

System C

Exposed system, tiles demountable



Recommended module in mm	Thickness/weight TOPIQ® Prime 15 mm (approx. 2,1 kg/m²)		
	System C		
	SK	VT-S 15/24	VT-S 15F
Please note minimum quantities and lead times.			
600 x 600	•	•	•
625 x 625	•	•	•
600 x 1200	•	•	•
625 x 1250	•	•	•