




# TOPIQ® Prime Hygena

$$\alpha_W = 0,95$$

TOPIQ® Prime Hygena combines excellent technical performance with simple elegance. Offering class A sound absorption with high humidity resistance good sound attenuation.

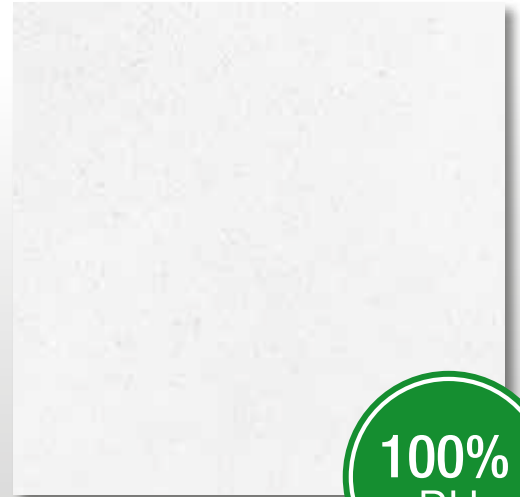



## Technical Performance

<b>Sound absorption</b>	EN ISO 354 $\alpha_W = 0.95$ according to EN ISO 11654 $NRC = 0.90$ according to ASTM C 423
<b>Sound attenuation</b>	$D_{n,f,w} = 24$ dB according EN ISO 10848
<b>Sound attenuation</b>	$R_w = 13$ dB according EN ISO 10140-2:2010
<b>Humidity resistance</b>	up to 100% relative humidity
<b>Building material class</b>	A1 according to EN 13501-1
<b>Light reflection</b>	For white similar to RAL 9010 glare-free approx. 88%
<b>Hygiene</b>	prevents bacteria and fungi
<b>Clean room classification</b>	class 5 according ISO 14644-1
<b>NF S 90-351:2013</b>	zone 4 bacteriological purity class: M1 decontamination class: CP <sub>(0,5)</sub> 5
<b>Colour</b>	White similar to RAL 9010

## System C

Exposed system, tiles demountable

Sound absorption values  
(TOPIQ® Prime Hygena)

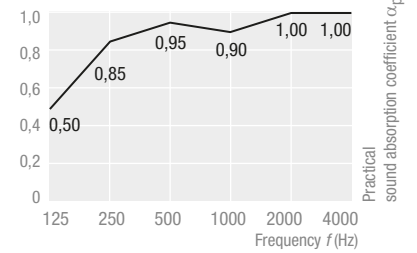

Recommended module in mm	Thickness/weight TOPIQ® Prime Hygena 15 mm (approx. 2,1 kg/m <sup>2</sup> )		
	System <span style="border: 1px solid black; padding: 0 2px;">C</span>		
	SK	VT-S 15/24	VT-S 15F
Please note minimum quantities and lead times.			
600 x 600	•	•	•
625 x 625	•	•	•
600 x 1200	•	•	•
625 x 1250	•	•	•